accuc@ld

ARS15PVLOCKER



72" x 23.38" x 24.38" (H x W x D)

Performance series Pharma-Vac 15 cu.ft. upright allrefrigerator for vaccine storage with 8 interior locking compartments, with antimicrobial silver-ion handle and hospital grade cord with 'green dot' plug

Highlights:

Intelligent microprocessor digital temperature controller

Improved temperature accuracy with a separate temperature probe for continuous product readout to simulate stored product temperature

Powder-coated handle with naturally occurring silver ions to help reduce germ spread

Product Features:


| Purpose-built design | Designed and purpose-built for pharmacy, medication, and vaccine applications to support meeting CDC/VFC guidelines | |
|---|--|--|
| +/-1°C Variation | The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period | |
| Antimicrobial silver ion-coated handle | Powder-coated handle with naturally occurring silver ions to help reduce the spread of germs | |
| Adjustable temperature | Intuitive controls let you adjust the interior temperature between +2 to +8°C | |
| Temperature alarm | Visual and audible alarms alert if the interior temperature rises or falls out of set range | |
| Remote alarm contacts | Electronic controller is equipped with a volt-free contact for alarm forwarding to an external remote system (contacts located in the external rear of the unit) | |
| Automatic defrost with adjustable cycle defrost | Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup | |
| Access port | Includes a pre-installed 1/2" probe hole in the right interior wall to allow easier connection to user-provided monitoring equipment | |
| Open door alarm | Alarm will sound if the door is left ajar for over 4 minutes (adjustable from 1-99 minutes) | |



accuc@ld

ARS15PVLOCKER Specifications:

| Overview | | |
|-------------------------------|------------------------|--|
| Height of Cabinet | 72.0" (183 cm) | |
| Width | 23.38" (59 cm) | |
| Width with Door Open | 23.88" (61 cm) | |
| Depth | 24.38" (62 cm) | |
| Depth with Handle | 26.13" (66 cm) | |
| Depth with door at 90° | 46.5" (118 cm) | |
| Capacity | 15.0 cu.ft. (425 L) | |
| Defrost Type | Automatic | |
| Door | White | |
| Cabinet | White | |
| US Electrical Safety | ETL | |
| Canadian Electrical Safety | ETL-C | |
| Amps | 1.4 | |
| Voltage/Frequency | 115 V AC/60 Hz | |
| Weight | 240.0 lbs. (109 kg) | |
| Shipping Weight | 280.0 lbs. (127 kg) | |
| Parts & Labor Warranty | 2 Years | |
| Compressor Warranty | 5 Years | |
| UPC | 761101074955 | |
| Refrigerator Features | | |
| Door Swing | RHD | |
| Reversible | Yes | |
| Shelf Type | Lockers | |
| Shelf Qty | 8 | |
| Thermostat Type | Digital | |
| Fan Type | Interior | |
| Refrigerant Type | R600a | |
| Refrigerant Amount | 2.65oz. | |
| Interior Light | Yes | |
| Temperature Range | 2 to 8°C | |
| Sound Level | 37.5 dB | |
| Dimensions | | |
| Interior Height | 63.25" (161 cm) | |
| Interior Width | 20.0" (51 cm) | |
| Interior Depth | 17.0" (43 cm) | |
| | | |

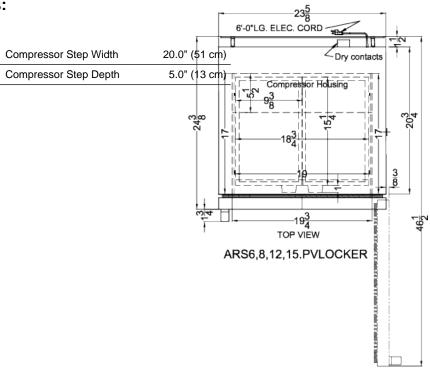

accuc@ld

