## accucold

# **ARS15MLLOCKER**



#### **Product Features:**

#### Purpose-built design Designed and purpose-built to meet the demanding needs of scientific, life science, laboratory, and medical cold storage applications +/-1°C Variation The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period Antimicrobial silver ion-coated handle Powder-coated handle with naturally occurring silver ions to help reduce the spread of germs Adjustable temperature Intuitive controls let you adjust the interior temperature between +2 to +10°C Temperature alarm Visual and audible alarms alert if the interior temperature rises or falls out of set range Remote alarm contacts Electronic controller is equipped with a volt-free contact for alarm forwarding to an external remote system (contacts located in the external rear of the unit) Automatic defrost with adjustable cycle Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup defrost Access port Includes a pre-installed 1/2" probe hole in the right interior wall to allow easier connection to user-provided monitoring equipment Open door alarm Alarm will sound if the door is left ajar for over 4 minutes (adjustable from 1-99 minutes)

ACCUCOLD DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799 72" x 23.38" x 24.38" (H x W x D)

Performance series Med-Lab 15 cu.ft. upright allrefrigerator with 8 interior locking compartments, antimicrobial silver-ion handle, and hospital grade cord with 'green dot' cord

#### **Highlights:**

Intelligent microprocessor digital temperature controller

Improved temperature accuracy with a separate temperature probe for continuous product readout to simulate stored product temperature


Powder-coated handle with naturally occurring silver ions to help reduce germ spread



## accuceld

### **ARS15MLLOCKER Specifications:**

| Overview                      |                        |
|-------------------------------|------------------------|
| Height of Cabinet             | 72.0" (183 cm)         |
| Width                         | 23.38" (59 cm)         |
| Width with Door Open          | 23.88" (61 cm)         |
| Depth                         | 24.38" (62 cm)         |
| Depth with Handle             | 26.13" (66 cm)         |
| Depth with door at 90°        | 46.5" (118 cm)         |
| Capacity                      | 15.0 cu.ft. (425 L)    |
| Defrost Type                  | Automatic              |
| Door                          | White                  |
| Cabinet                       | White                  |
| US Electrical Safety          | ETL                    |
| Canadian Electrical<br>Safety | ETL-C                  |
| Amps                          | 1.4                    |
| Voltage/Frequency             | 115 V AC/60 Hz         |
| Weight                        | 240.0 lbs. (109<br>kg) |
| Shipping Weight               | 250.0 lbs. (113<br>kg) |
| Parts & Labor Warranty        | 2 Years                |
| Compressor Warranty           | 5 Years                |
| UPC                           | 761101074979           |
| Refrigerator Features         |                        |
| Door Swing                    | RHD                    |
| Reversible                    | Yes                    |
| Shelf Type                    | Lockers                |
| Shelf Qty                     | 8                      |
| Thermostat Type               | Digital                |
| Fan Type                      | Interior               |
| Refrigerant Type              | R600a                  |
| Refrigerant Amount            | 2.65oz.                |
| Interior Light                | Yes                    |
| Temperature Range             | 2 to 10°C              |
| Sound Level                   | 37.5 dB                |
| Dimensions                    |                        |
| Interior Height               | 63.25" (161 cm)        |
| Interior Width                | 20.0" (51 cm)          |
| Interior Depth                | 17.0" (43 cm)          |
| Compressor Step Height        | 6.5" (17 cm)           |
|                               |                        |

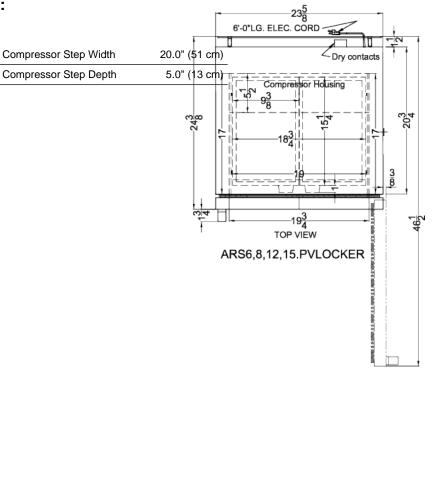



## accucold

