accucold

ARG2PV-CRTLHD



22.25" x 18.5" x 23.25" (H x W x D)

Performance series 2 cu.ft. countertop glass door controlled room temperature cabinet for pharmaceuticals and vaccines in a white finish with lock and antimicrobial silver-ion handle

Highlights:

Adjustable operating control range from 68 to $77^{o}F$ (preset to $72^{o}F)$

Controlled room temperature cabinet to store medication, pharmaceuticals, and other sensitive materials at 72°F

Intelligent microprocessor digital temperature controller

Product Features:

Controlled Room Temperature Cabinet	Purpose-built design to store medication, pharmaceuticals, and other sensitive materials at 72°F	
Purpose-built design	Designed and purpose-built to support manufacturer recommendations for storage of pharmacy, medication, and vaccines within 20° - 25°C (68° - 77°F) as defined by USP 1079> Good Storage and Distribution Practices for Drug Products	
+/-1.5°C Variation	The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period	
Stable operation	Designed to maintain a set temperature, even when ambient room temperature is as cold as 68°F or as high as 86°F	
Antimicrobial silver ion-coated handle	Powder-coated handle with naturally occurring silver ions to help reduce germ spread	
Adjustable temperature	Intuitive controls let you adjust the interior temperature between +68 to +77°F	
Temperature alarm	Visual and audible alarms alert if the interior temperature rises or falls out of set range	
Remote alarm contacts	Electronic controller is equipped with a volt-free contact for alarm forwarding to an external remote system (contacts located in the external rear of the unit)	


Automatic defrost with adjustable cycle Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup Activities Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup Activities Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup Activities Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup Activities Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup Activities Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup Activities Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup Activities Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup Activities Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup Activities Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup Activities Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup Activities Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup Activities Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup Activities Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup Activities Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup Activities Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup Activities Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup Activities Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup Activities Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup Activities Adjustable

accucold

ARG2PV-CRTLHD Specifications:

Overview			
Height of Cabinet	22.25" (57 cm)		
Width	18.5" (47 cm)		
Width with Door Open	18.88" (48 cm)		
Depth	23.25" (59 cm)		
Depth with Handle	24.75" (63 cm)		
Depth with door at 90°	42.5" (108 cm)		
Capacity	1.94 cu.ft. (55 L)		
Defrost Type	Automatic		
Door	Glass		
Cabinet	White		
US Electrical Safety	ETL		
Canadian Electrical Safety	ETL-C		
Amps	0.6		
Voltage/Frequency	115 V AC/60 H		
Weight	80.0 lbs. (36 kg		
Parts & Labor Warranty	2 Years		
Compressor Warranty	5 Years		
UPC	761101107028		
Refrigerator Features			
Door Swing	LHD		
Reversible	No		
Shelf Type	Wire		
Shelf Qty	2		
Adjustable Shelves	Yes		
Thermostat Type	Digita		
Fan Type	Interio		
Refrigerant Type	R600a		
Refrigerant Amount	0.84oz		
High Side PSI	280.0		
Low Side PSI	90.0		
Interior Light	Yes		
Temperature Range	68 to 77ºF (preset to 72ºF		
Sound Level	42.4 dE		
Dimensions			

Interior Height	16.5" (42 cm)
Interior Width	15.25" (39 cm)
Interior Depth	15.75" (40 cm)
Compressor Step Height	8.25" (21 cm)
Compressor Step Width	15.25" (39 cm)
Compressor Step Depth	4.25" (11 cm)

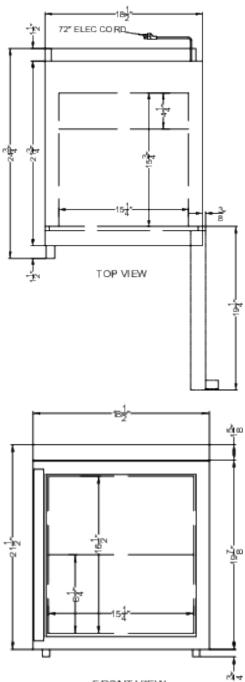

FRONT VIEW

